



MAPLE
SPC FLOORING

Anti-scratch



Waterproof and Moisture proof



Six Major Advantages

Antislip and Comfortable



Eco-friendly and Safety



Fireproof and Flame Retartant



Easy to install and support DIY






► SPC FLOOR SPECIFICATIONS

	DETAILS
Size	1220 x 183mm , 1524 x 228mm , 610 x 305mm , 640 x128mm herringbone , customized
Thickness	3.5mm , 4.0mm , 4.5mm , 5.0mm , 5.5mm , 6.0mm , 6.5mm , 7.0mm
Wear Layer	0.1-1.0mm , customized
Color Pattern	Wood Pattern, Stone Pattern, Carpet Pattern
Material	100% virgin PVC and Calcium Carbonate
Layer	UV Coating, Wear Layer, Decor Film, SPC Rigid Core, Back Foam
Density	2.1g/cm ³

► SPC FLOOR LAYERING

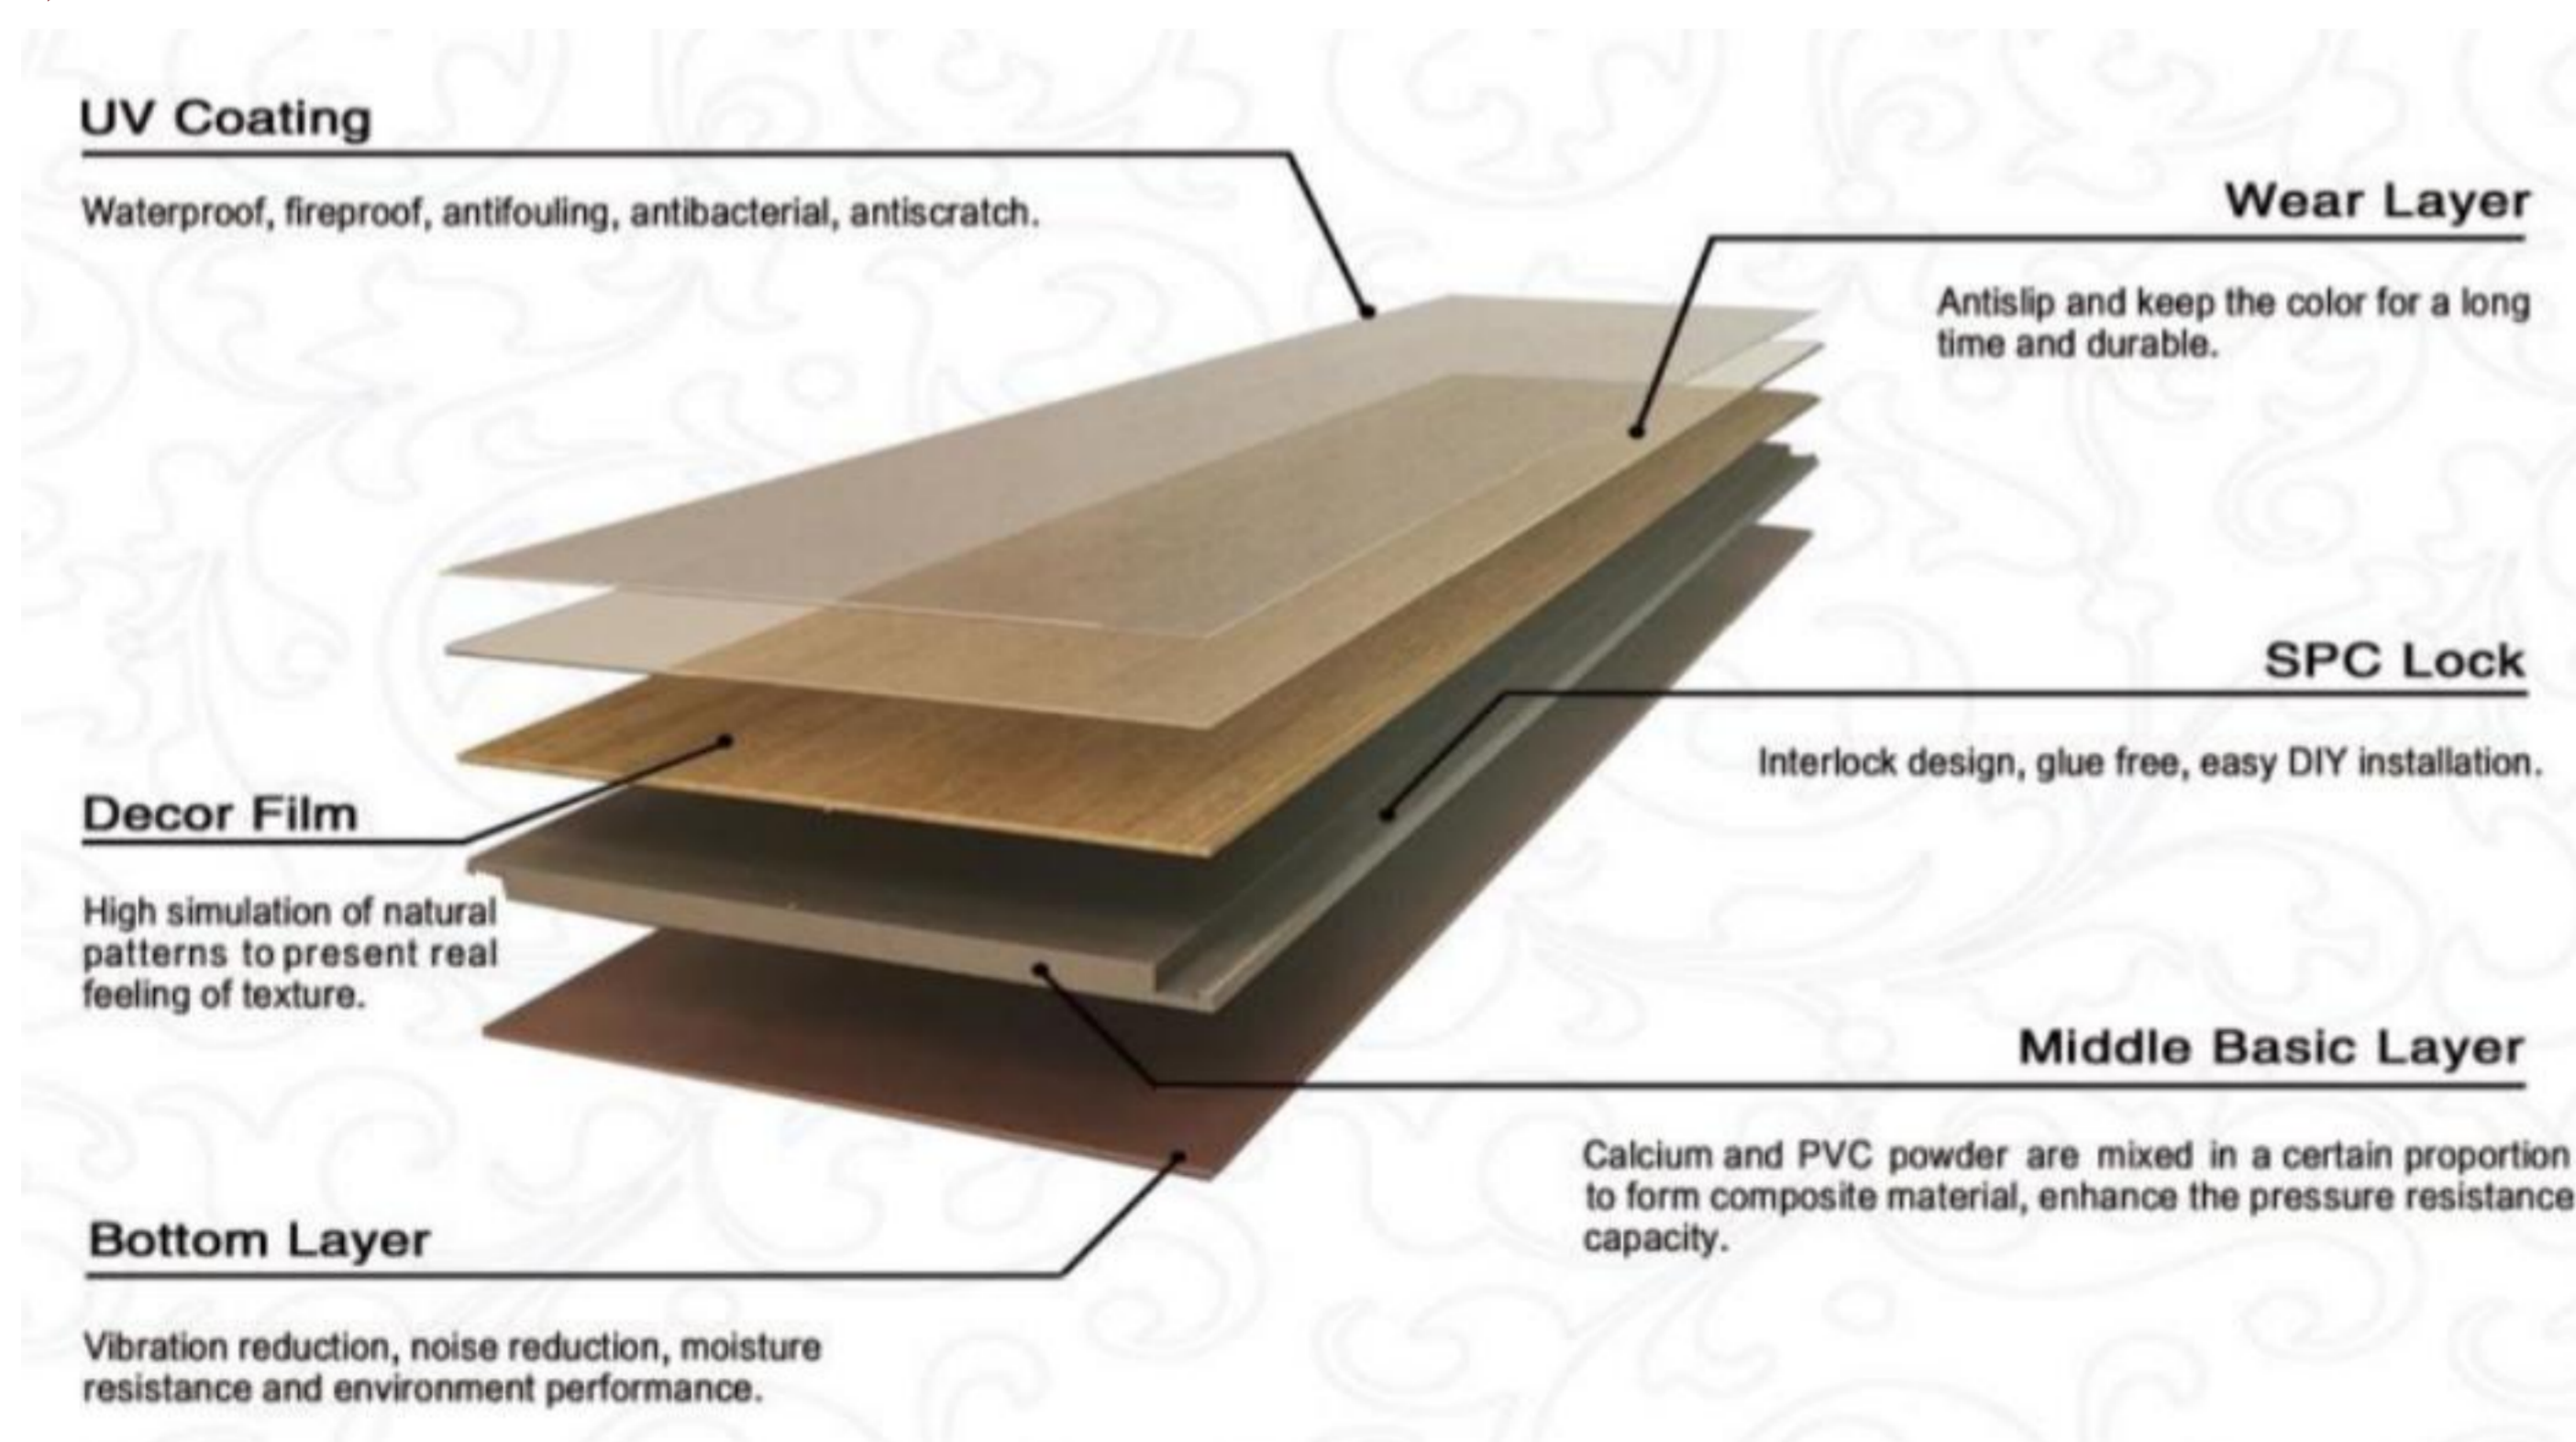



8623



Thickness: 6.3mm (with IXPE & WL) | Wear layer: 0.3mm | Size: 1220mm x 183mm



2837



Thickness: 6.3mm (with IXPE & WL) | Wear layer: 0.3mm | Size: 1220mm x 183mm



8661



Thickness: 6.3mm (with IXPE & WL) | Wear layer: 0.3mm | Size: 1220mm x 183mm



2863



Thickness: 6.3mm (with IXPE & WL) | Wear layer: 0.3mm | Size: 1220mm x 183mm



8605



Thickness: 6.3mm (with IXPE & WL) | Wear layer: 0.3mm | Size: 1220mm x 183mm



8677



Thickness: 6.3mm (with IXPE & WL) | Wear layer: 0.3mm | Size: 1220mm x 183mm

